

## **BAGGER NATION HINGE COVER INSERT KIT**



**IMPORTANT**: Please read through these instructions completely before beginning installation.

Step 1: Identify your hardware. You have your hinge inserts, three screws and a drill bit.




Step 2: Use the provided drill bit to drill three holes in the stock reflector equally spaced apart.



See image below for hole locations. You only need to break through the plastic. Do not drill the hinge cover.



Step 3: Use the provided screws to thread through the reflector.

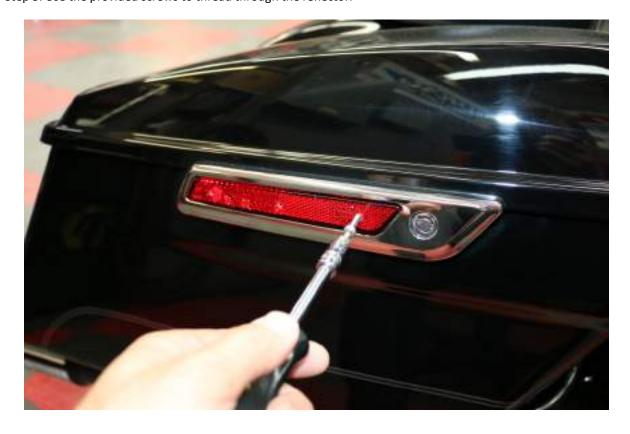

Thread the three screws through evenly,  $\frac{1}{2}$  a turn at a time to push the reflector off of the hinge cover.




Reflector removed.



Step 4: Use a good, sharp flat blade screwdriver to carefully scrape the OEM foam tape out of the hinge cover.



Take your time and be careful not to scratch the cosmetic part of the hinge cover.

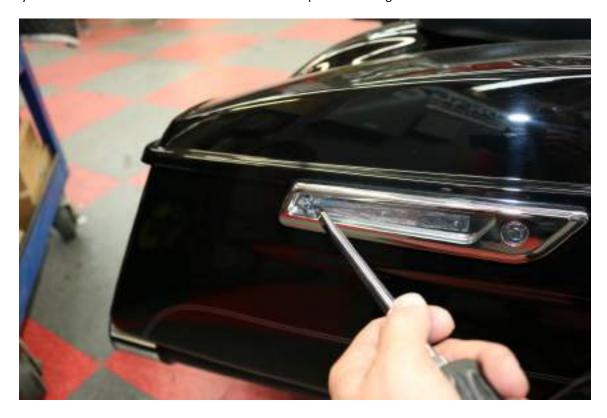

Step 5: Use some rubbing alcohol and a shop towel to remove sticky tape residue from the mounting surface.






Insure that you get 100% of the glue residue off of the hinge cover. It will look nice and clean, like this:



Step 6: Carefully peel back the adhesive strip from your new hinge cover insert.



Step 7: Firmly press your new hinge cover insert into its pocket in the hinge cover. Hold firmly for thirty seconds.

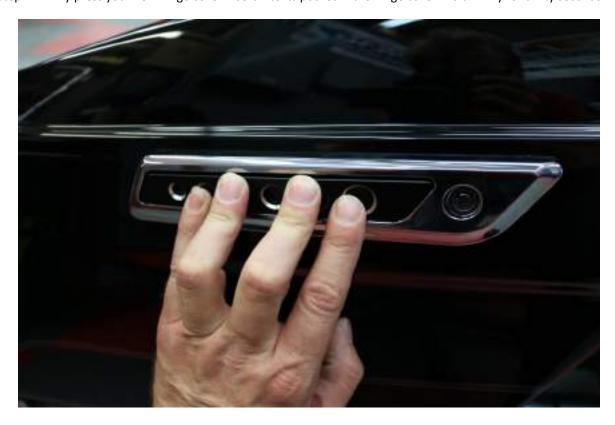

Step 8: Go back and repeat the process for the other side. Enjoy your new Bagger Nation hinge cover inserts!



If you have any questions or comments, please contact us at <u>cs@baggernation.com</u> or call 602-840-4205.

Thank you for your purchase, we really appreciate your business!